



GARDEN PRODUCTS

KING'S LYNN

Oldmedow Road
King's Lynn, Norfolk
PE30 4LD

01553 760 000
kingslynn@timberservices.com

STOWMARKET

Gun Cotton Way,
Stowmarket, Suffolk
IP14 5XE

01449 860 000
stowmarket@timberservices.com

OPENING HOURS:

MON - FRI 07:00 - 17:00
SAT 08:00 - 12:00

TimberServicesUK



@ServicesTimber



timberservicesltd



FENCING PANELS

TIMBER SERVICES CAN SUPPLY ALL YOUR FENCING MATERIALS, INCLUDING PANELS, POSTS, GRAVEL BOARDS AND POSTFIX, SO ALL YOU NEED TO WORRY ABOUT IS GETTING YOUR FENCE PUT UP!

- Firstly choose your panels (starting with our 'traditional' options on this page, or our 'contemporary' options overleaf);
- Next choose a gravel board to suit (imperial width for 'traditional' panels, metric width for 'contemporary' panels);
- Then select the appropriate post height (allowing for 450mm to 600mm to sink into the ground);
- Lastly, decide upon how many bags of postfix you require (we recommend 1½ - 2 bags per post).



Key	Product	Available as	Page	Recommendation
A	Fence Panel	Various Styles	2-4	
B	Post	Timber, Steel, Concrete	6, 9-10	450 - 600mm in the ground
C	Gravel Board	Timber, Composite, Concrete	6, 9-10	
D	Postfix / Postcrete	20kg Bag	7	1½ - 2 bags per post



**FEATHER EDGE CLOSEBOARD
PRESSURE TREATED**

H	W	SKU
1.83m	1.83m	F5
1.65m	1.83m	F6
1.52m	1.83m	F7
1.22m	1.83m	F9

BESPOKE
SIZES MADE
TO ORDER



**FEATHER EDGE TAPERED PANEL
PRESSURE TREATED**

H	W	SKU
To Order	To Order	F17



**STANDARD LAP (WANAY EDGE)
TREATED**

H	W	SKU
1.83m	1.83m	F1
1.52m	1.83m	F2
1.22m	1.83m	F3
0.9m	1.83m	F4

FENCING PANELS



OMEGA LATTICE TOP

H	W	SKU
1.8m	1.8m	OLT180
1.5m	1.8m	OLT150
1.2m	1.8m	OLT120
0.9m	1.8m	OLT90



SQUARE HORIZONTAL

H	W	SKU
1.8m	1.8m	SH180
1.5m	1.8m	SH150
1.2m	1.8m	SH120
0.9m	1.8m	SH90



'V' ARCHED

H	W	SKU
1.8m	1.8m	VA180
1.5m	1.8m	VA150
1.2m	1.8m	VA120
0.9m	1.8m	VA90



HORIZONTAL LATTICE TOP

H	W	SKU
1.8m	1.8m	HLT180
1.5m	1.8m	HLT150
1.2m	1.8m	HLT120



ARCHED LATTICE TOP

H	W	SKU
1.8m	1.8m	ALT180



ARCHED HORIZONTAL

H	W	SKU
1.8m	1.8m	AH180



TONGUE & GROOVE ARCHED TOP

H	W	SKU
1.8m	1.8m	TGA180
1.2m	1.8m	TGA120



TONGUE & GROOVE FLAT TOP

H	W	SKU
1.8m	1.8m	TGF180
1.2m	1.8m	TGF120



TONGUE & GROOVE LATTICE TOP

H	W	SKU
1.8m	1.8m	TGLT180
1.5m	1.8m	TGLT150
1.2m	1.8m	TGLT120

FENCING PANELS



SLATTED

H W SKU
 1.8m 1.8m SLA180
 1.2m 1.8m SLA120



HAZEL HURDLE

H W SKU
 1.8m 1.8m HH180
 1.8m 1.2m HH120



PREMIUM WOVEN PANELS

H W SKU
 1.8m 1.8m PW180
 1.5m 1.8m PW150
 1.2m 1.8m PW120



**PICKET PANELLING
 PRESSURE TREATED**

H W SKU
 0.91m 1.83m F18
 1.22m 1.83m F19



ELITE CROSS TOP

H W SKU
 0.90m 1.80m ECT90




VERTICAL SLATTED

H W SKU
 0.9m 1.80m VS90



SQUARE TRELLIS - BROWN, SAWN

H W SKU
 1.83m 1.83m F56
 1.22m 1.83m F58
 0.90m 1.83m F59
 0.60m 1.83m F60
 0.30m 1.83m F61

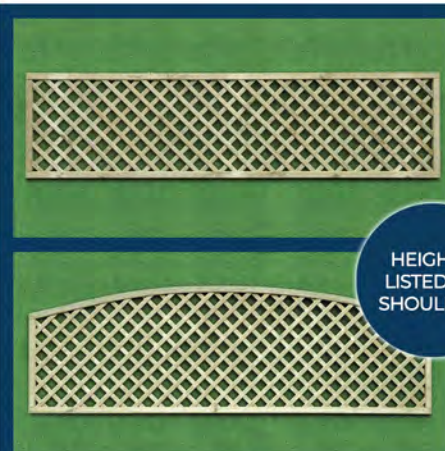

DIAMOND LATTICE | BOWED LATTICE

H	W	SKU	H	W	SKU
1.80m	1.83m	DT13	0.60m	1.83m	DT5
1.20m	1.83m	DT11	0.45m	1.83m	DT3
0.90m	1.83m	DT10	0.30m	1.83m	DT1
0.60m	1.83m	DT9			
0.45m	1.83m	DT8			
0.30m	1.83m	DT7			

HEIGHTS LISTED TO SHOULDER



OMEGA LATTICE


H W SKU
 1.80m 1.80m OL180

CLOSEBOARD FENCING GUIDE

TIMBER SERVICES CAN SUPPLY ALL YOUR CLOSEBOARDING MATERIALS, INCLUDING FEATHER EDGE, POSTS, GRAVEL BOARDS, CANT RAILS, CAPPING AND POSTFIX, SO ALL YOU NEED TO WORRY ABOUT IS GETTING YOUR FENCE PUT UP!

We recommend basing your run of fencing on 3.0m bays, so your post centres will fit our 3.0m long Concrete Gravel Boards with Cant Rails and Capping to suit. These can be bolted to our Recessed Concrete Posts, which have recesses to accept Cant Rails.

As an alternative, we can offer a 3.6m Timber Gravel Board with a 3.6m long Cant Rail to suit. These can be bolted to the Concrete (or Timber) Posts in the same way, however with a 3.6m bay we would recommend a supporting post at the centre point (1.8m).

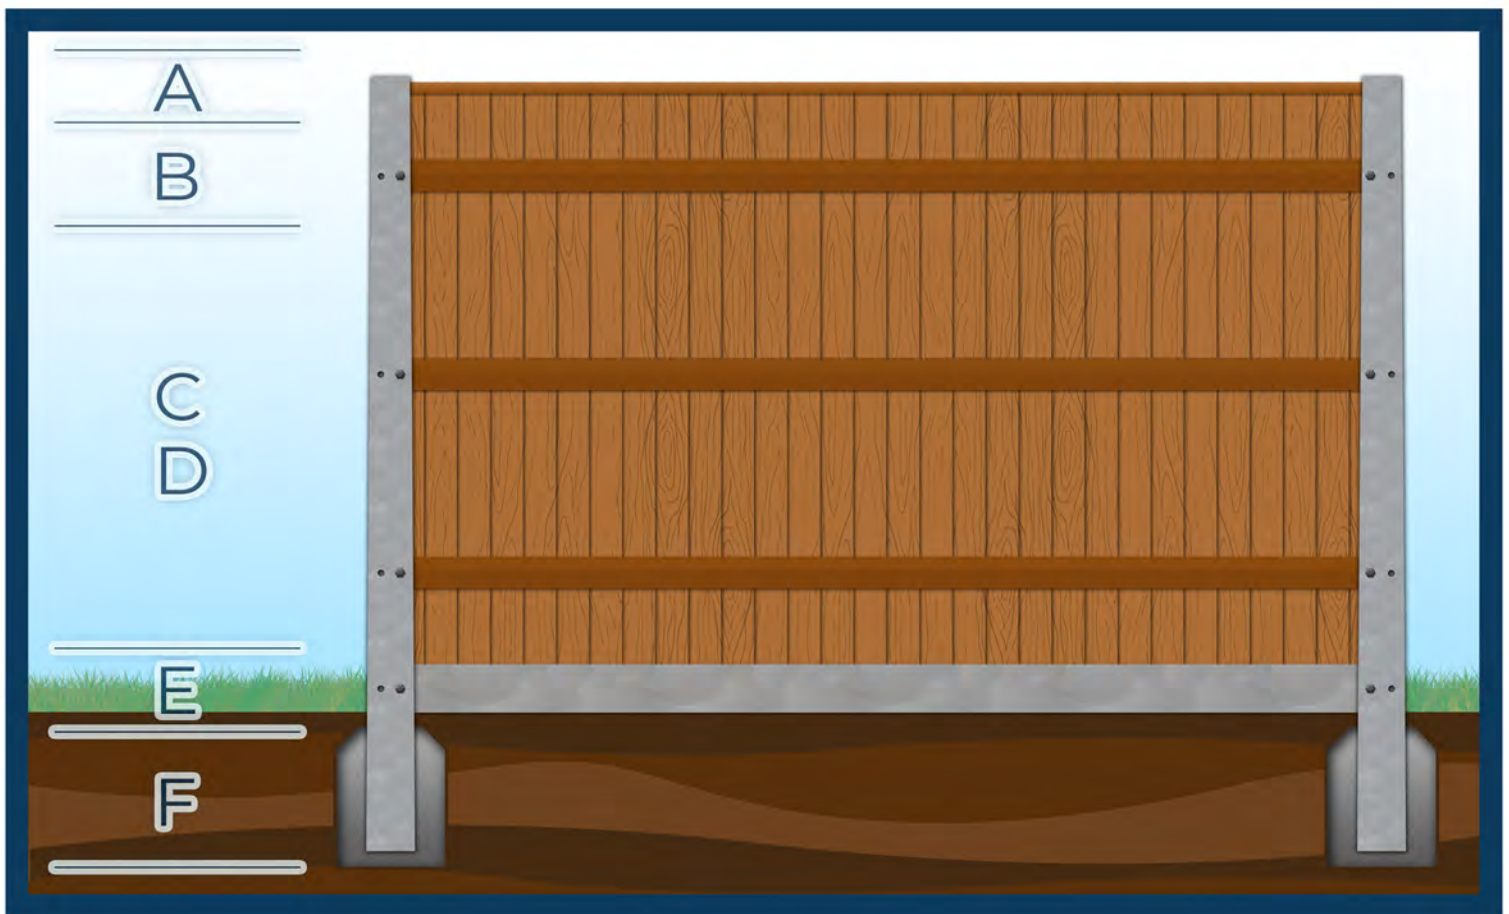

Key	Product	Available as	Page	Recommendation
A	Capping	3.0m Lengths	6	
B	Cant Rail	3.0m or 3.6m Lengths	6	
C	Feather Edge	Various Lengths	6	10 boards per meter
D	Post	Timber, Steel, Concrete	6, 9-10	
E	Gravel Board	Timber, Composite, Concrete	6, 9-10	
F	Postfix / Postcrete	20kg Bag	7	1½ - 2 Bags per Post

**BOLTS
AVAILABLE IN
STORE**

FENCING COMPONENTS



FEATHER EDGE – PRESSURE TREATED
(2ex)

T	W	L	SKU
22mm	125mm	1800mm	F24
22mm	125mm	1650mm	F23
22mm	125mm	1500mm	F22
22mm	125mm	1350mm	F215
22mm	125mm	1200mm	F21
22mm	125mm	1050mm	F20



CANT RAIL – PRESSURE TREATED
(2ex)

T	W	L	SKU
47mm	125mm	3000mm	F25
47mm	125mm	3600mm	F26



TIMBER POST (SAWN) PRESSURE TREATED

T	W	L	SKU
100mm	100mm	3000mm	F36
100mm	100mm	2400mm	F38
100mm	100mm	1800mm	F40
75mm	75mm	2400mm	F43
75mm	75mm	1800mm	F45



GRAVEL BOARD – PRESSURE TREATED

T	W	L	SKU
22mm	150mm	1830mm	F28
22mm	150mm	3000mm	F29
22mm	150mm	3600mm	F30



GROOVED CAPPING PRESSURE TREATED

T	W	L	SKU
38mm	65mm	3000mm	F32



PANEL CAPPING – PRESSURE TREATED

T	W	L	SKU
16mm	50mm	1830mm	F62



POST CAP – PRESSURE TREATED (GREEN & BROWN)

T	W	SKU
100mm	100mm	F50
75mm	75mm	F51



PADDOCK POST - PRESSURE TREATED

T	W	L	SKU
75mm	125mm	1800mm	F48



PADDOCK RAIL - PRESSURE TREATED

T	W	L	SKU
38mm	88mm	3600mm	F31

FENCING COMPONENTS



**WEATHER TOP GATE POST
PRESSURE TREATED**

T	W	L	SKU
150mm	150mm	2400mm	F92
150mm	150mm	3000mm	F172
175mm	175mm	2400mm	F91



**SMOOTH PLANED POST
PRESSURE TREATED**

T	W	L	SKU
90mm	90mm	1800mm	F214
90mm	90mm	2400mm	F221



POSTFIX / POSTCRETE

Weight	SKU
20kg	A8



**MACHINE ROUND POINTED POLES
PRESSURE TREATED**

Dia.	L	SKU
50mm	1800mm	F64
75mm	1800mm	F65
75mm	2400mm	F66
100mm	1800mm	F67
100mm	2400mm	F68



**HALF ROUND RAILS
PRESSURE TREATED**

Dia.	L	SKU
100mm	3600mm	F70



**FULL ROUND 'JUMP' RAILS
PRESSURE TREATED**

Dia.	L	SKU
100mm	3600mm	F192



**ROUND TOP PICKET PALES
PRESSURE TREATED**

T	W	L	SKU
22mm	75mm	900mm	F33
22mm	75mm	1200mm	F34



PICKET RAIL - PRESSURE TREATED

T	W	L	SKU
22mm	75mm	1800mm	F148



GALVANISED POST SUPPORTS

DESC.	T	W	SKU
Bolt-Down Shoe	75mm	75mm	A5
Bolt-Down Shoe	100mm	100mm	A6
Drive-In Spike	75mm	75mm	A2
Drive-In Spike	100mm	100mm	A4

DuraPost®

BY FENCEMATE

STRONG. STYLISH. VERSATILE.

Easy to install and built to last, DuraPost is the complete fencing solution for homeowners.

It's also compatible with most types of fencing, and comes in different colours and accessories, so you can create a design that not only suits your space but your budget too.

FENCE POSTS BUILT TO LAST

Designed by industry experts and trusted by homeowners and professionals

DuraPost is a great alternative to a timber or concrete fence posts. Built from galvanised steel, it's lighter while offering both durability and strength. It has been designed to work with virtually all types of fence panels and boards.

RELIABLE

Quality and peace of mind is important to us. It's why we have tested DuraPost in winds of up to 110mph and offer up to a 25-year guarantee*. We're confident they can stand up to the task.

VERSATILE

DuraPosts work with virtually any type of fencing, so you can tailor a solution to suit you and your garden.

Details matter: Colour matched screws are available to purchase separately.

HASSLE FREE


DuraPosts are easy to fit, taking roughly half the time to fit than some traditional fence posts. They're maintenance-free too.

STRONG AND SECURE

DuraPost's pre-drilled holes mean fence panels can be securely fixed, unlike concrete posts that allow panels to be lifted up and out.

*For guarantee details visit www.durapost.cb.uk

CONTEMPORARY FENCING COMPONENTS

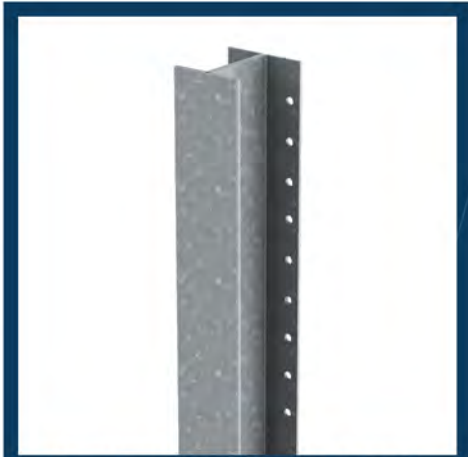

**DuraPost® INTERMEDIATE POST
GALVANISED**

T	W	L	SKU
48mm	51mm	1800mm	A876
48mm	51mm	2400mm	A877
48mm	51mm	2700mm	A2399



**DuraPost® INTERMEDIATE POST
ANTHRACITE**

T	W	L	SKU
48mm	51mm	1800mm	A964
48mm	51mm	2400mm	A932
48mm	51mm	2700mm	A2398



**DuraPost® INTERMEDIATE POST
BROWN**

T	W	L	SKU
48mm	51mm	1800mm	A2397
48mm	51mm	2400mm	A878
48mm	51mm	2700mm	A879



**DuraPost® COMPOSITE GRAVEL BOARD
ANTHRACITE**

T	W	L	SKU
48mm	155mm	1833mm	A938



**DuraPost® COMPOSITE GRAVEL BOARD
BROWN**

T	W	L	SKU
48mm	155mm	1833mm	A887



**DuraPost® POST CAP WITH BRACKET
ANTHRACITE**

T	W	SKU
75mm	75mm	A2371




**DuraPost® POST CAP WITH BRACKET
BROWN**

T	W	SKU
75mm	75mm	A2400




GUARANTEED
— UP TO —
25
YEARS

CONCRETE FENCING PRODUCTS

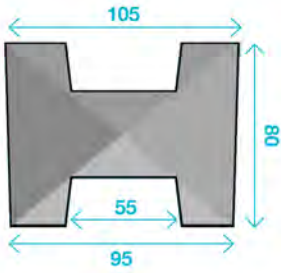


INTERMEDIATE POST (FOR PANELS)

L	SKU
1500mm / 5ft	C1
1800mm / 6ft	C2
2100mm / 7ft	C3
2400mm / 8ft	C4
2700mm / 9ft	C5

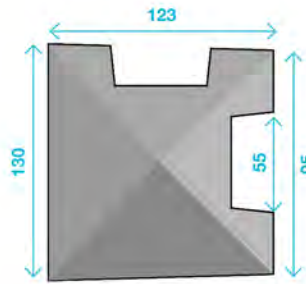

CORNER "L" SECTION POST (FOR PANELS)

L	SKU
1800mm / 6ft	C6
2400mm / 8ft	C7
2700mm / 9ft	C21

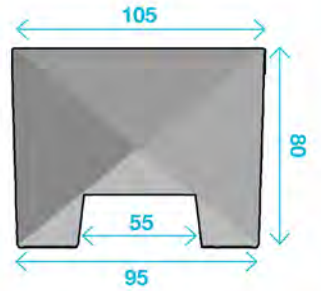

END "C" SECTION POST (FOR PANELS)

L	SKU
2400mm / 8ft	C43
2700mm / 9ft	C44



GRAVEL BOARDS - IMPERIAL (FOR TRADITIONAL PANELS)

H	W	SKU
150mm	1830mm / 6ft	C9
300mm	1830mm / 6ft	C19



GRAVEL BOARDS - METRIC (FOR CONTEMPORARY PANELS)

H	L	SKU
150mm	1800mm	C8



RECESSED POST (FOR CLOSEBOARDING)

L	SKU
1500mm / 5ft	C47
1800mm / 6ft	C13
2500mm / 8ft	C11



GRAVEL BOARDS (FOR CLOSEBOARDING)

H	W	SKU
150mm	3000mm	C37



REPAIR SPUR


W	T	L	SKU
75mm	75mm	1000mm	C33



BOLTS, WASHERS & HARDWARE

All in Stock to Suit
Enquire within

LANDSCAPING & CLADDING PRODUCTS

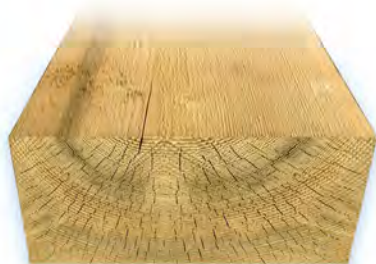

LANDSCAPING SLEEPERS

T	W	L	SKU
PRESSURE TREATED SOFTWOOD			
100mm	200mm	2400mm	F72
FRESH SAWN OAK			
100mm	200mm	2400mm	F131



**SAWN SCAFFOLD STYLE BOARD
PRESSURE TREATED**

T	W	L	SKU
36mm	225mm	3600mm	T372




POINTED PEGS / SETTING-OUT STAKES

T	W	L	SKU
45mm	45mm	450mm	T256
45mm	45mm	600mm	T257



**FEATHER EDGE CLADDING
PRESSURE TREATED**

T	W	L	SKU
22mm (2ex)	150mm	3600mm	T213
32mm (2ex)	175mm	3600mm	T214
32mm (2ex)	175mm	4800mm	T214

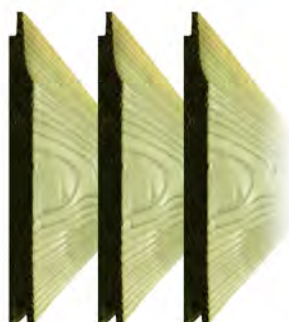

**SHIPLAP CLADDING (T&G)
PRESSURE TREATED**

T	W	SKU
12mm	120mm	T542



**SHIPLAP CLADDING - REBATED
UNTREATED**

T	W	SKU
15mm	120mm	T162



**LOGLAP CLADDING - WHITWOOD
UNTREATED**

T	W	SKU
22mm	100mm	T160



**PMV / PTGV CLADDING
UNTREATED**

T	W	SKU
16mm	120mm	T348
20mm	120mm	T156



SPECIALIST CLADDING

Material Options	Profiles Options
W/R Cedar	Shiplap, PMV, Channel
Larch	Shiplap, PMV, Channel
Douglas Fir	Feather Edge, Waney
Oak	Waney Edge Board


TIMBER DECKING

DECKING GUIDE

TIMBER SERVICES CAN SUPPLY ALL YOUR DECKING MATERIALS, INCLUDING DECK BOARDS, NEWEL POSTS, SPINDLES, HAND AND BASE RAIL AND SUBFRAME JOISTS, SO ALL YOU NEED TO WORRY ABOUT IS GETTING YOUR DECK INSTALLED!

Firstly decide what height from ground level you would like your deck to finish at and choose a joist width to suit. (See page 15 for a list of our standard timber sizes). Once chosen, you can start to plan your subframe. A standard spacing between joists is 450mm but in some cases this can be stretched to 600mm or for extra sturdiness (as specified by some composite decking manufacturers to maintain any warranty) you can shrink the spacings down to 400mm or even 300mm. Noggins or cross members can be spaced every 1.0m or 1.2m, to provide extra rigidity.

Once your decking topboard is chosen, we recommend planning your deck space to suit available lengths of timber to minimise waste and save money, utilising as much of a board's length as possible.

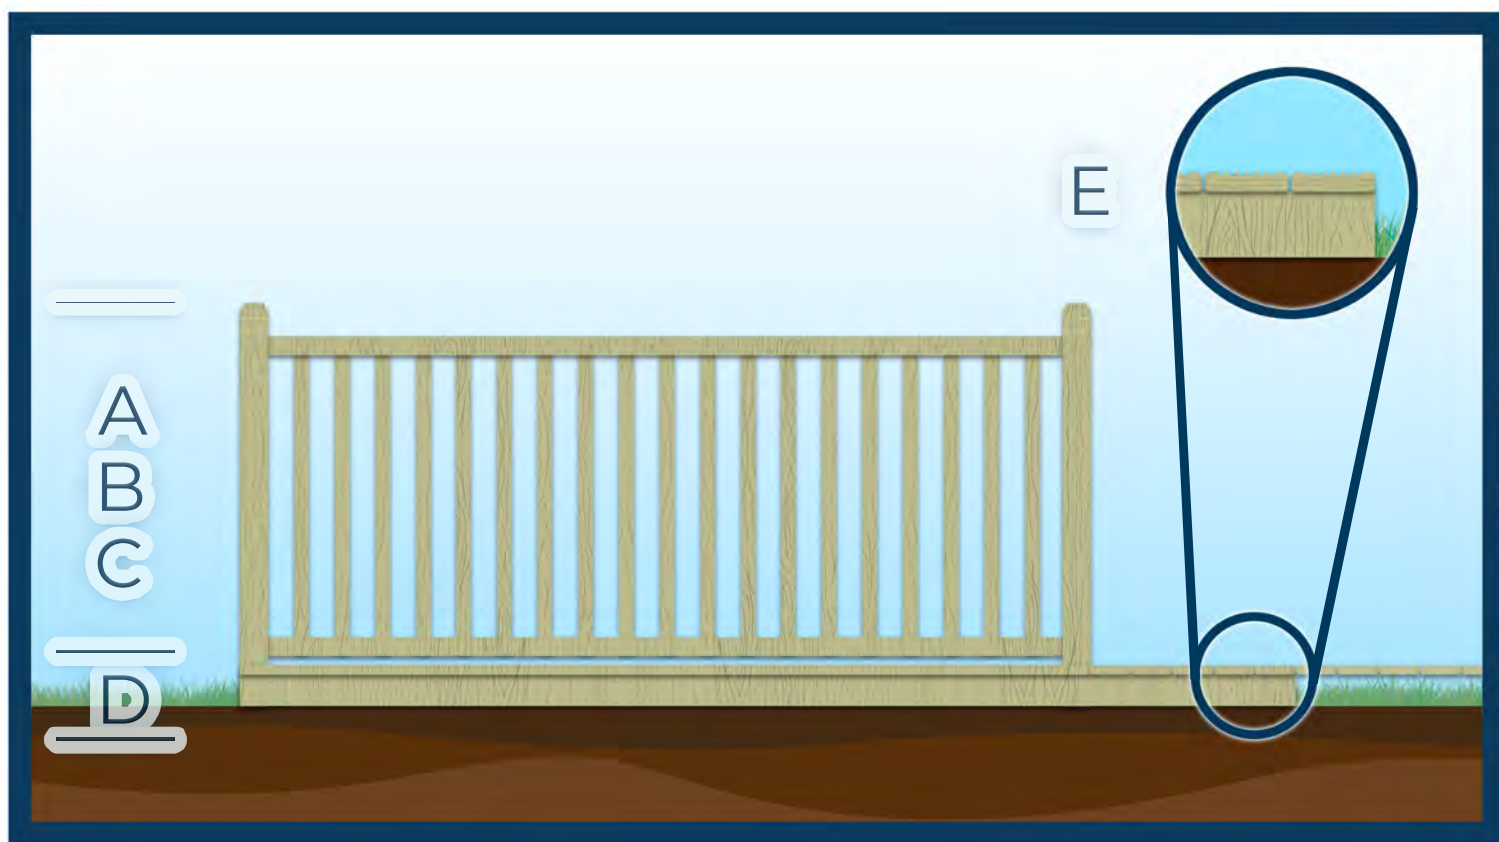


Key	Product	Available as	Page	Recommendation
A	Newel Post	Square / Turned	13	Spaced at 2.4m
B	Spindle	Square / Turned	13	Gaps not to exceed 100mm
C	Hand & Base Rail	2.4m Length	13	Universal, includes fillet
D	Subframe / Joists	Various Lengths	13, 15	[VARIOUS] x 45mm
E	Decking Board	Various Lengths	13	5mm Expansion Gap

DECKING COMPONENTS




**SOFTWOOD DECKING BOARD
PRESSURE TREATED**

T	W	L	SKU
27mm	120mm	2400mm	T731
27mm	120mm	3000mm	T732
27mm	120mm	3600mm	T733
27mm	120mm	4200mm	T734
27mm	120mm	4800mm	T735
27mm	120mm	5400mm	T736

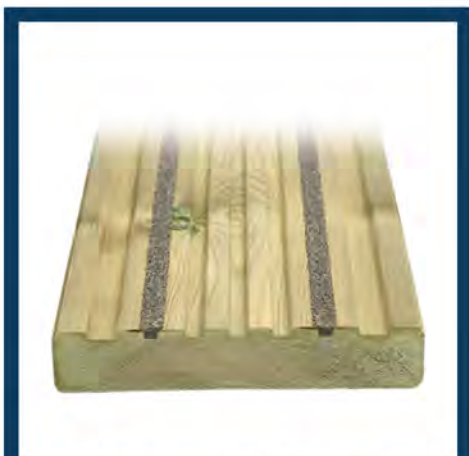


**ANTI-SLIP "Q-GRIP CANTERBURY"
DECKING - PRESSURE TREATED**

T	W	L	SKU
27mm	145mm	4800mm	T440

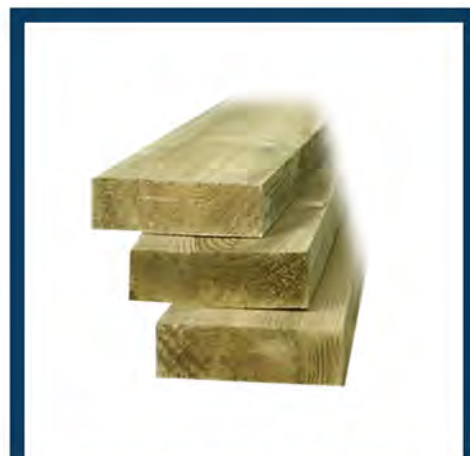

**SOFTWOOD SUBFRAME / JOISTS
PRESURE TREATED**

T	W	L	SKU
45mm	95mm	3600mm	T614
		4800mm	T618
45mm	145mm	3600mm	T636
		4800mm	T640

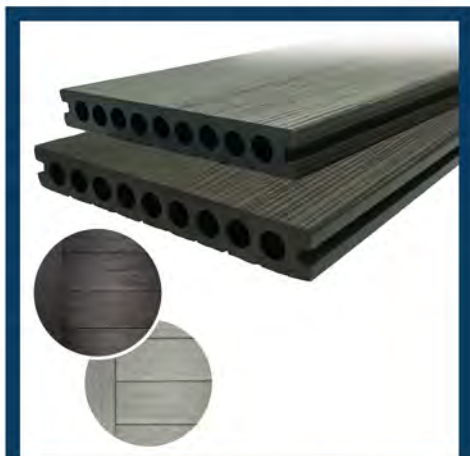

COMPOSITE BROAD DECK

T	W	L	Colour	SKU
22mm	158mm	3600mm	Grey	H21
22mm	158mm	3600mm	Dark Brown	H20



COMPOSITE WEATHERED DECK RANGE

T	W	L	Colour	SKU
22mm	142mm	3600mm	Oak	H22
22mm	142mm	3600mm	Grey	H23



COMPOSITE TWIN DECK RANGE

T	W	L	Colour	SKU
22mm	143mm	3600mm	Coffee/Walnut	H34
22mm	143mm	3600mm	Light/Dark	H35



NEWEL POST - PRESSURE TREATED

T	W	L	SKU
SQUARE, CHAMFERED TOP			
83mm	83mm	1250mm	T252
TURNED, 'COLONIAL' BALL TOP			
83mm	83mm	1350mm	T251



SPINDLE - PRESSURE TREATED

T	W	L	SKU
SQUARE			
41mm	41mm	900mm	T254
TURNED, 'COLONIAL'			
41mm	41mm	900mm	T253



**UNIVERSAL HAND / BASE RAIL
(INC. FILLET) - PRESSURE TREATED**

T	W	L	SKU
44mm	68mm	2400mm	T255

GATES



"HIGHGROVE" FIELD / FIVE-BAR GATE
PRESSURE TREATED

H	W	
1095mm	from 920mm	3ft
	to 3660mm	12ft



FEATHER EDGE GATE
PRESSURE TREATED

H	W	Style	SKU
1800mm	762mm	Unframed	F97
1800mm	900mm	Unframed	F98
1800mm	900mm	Framed	FEG180PB



TONGUE & GROOVE GATE
PRESSURE TREATED

H	W	Style	SKU
1800mm	900mm	Arched Top	TG180
1800mm	900mm	Flat Top	FTG180



HORIZONTAL LATTICE TOP GATE
PRESSURE TREATED

H	W	SKU
1800mm	900mm	HLTG180



ARCHED LATTICE TOP GATE
PRESSURE TREATED

H	W	SKU
1800mm	900mm	ALTG180



ELITE TONGUE & GROOVE GATE
PRESSURE TREATED

H	W	Style	SKU
1800mm	900mm	Framed	ETG180




ELITE CROSS TOP GATE
PRESSURE TREATED

H	W	SKU
900mm	900mm	ECTG90



"HAMPTON" COURTYARD GATE
PRESSURE TREATED

H	W	SKU
900mm	900mm / 3ft	RG90 (Regency)

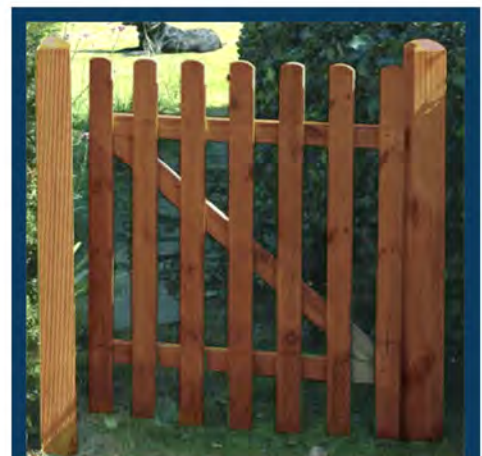

PICKET GATE - PRESSURE TREATED

H	W	SKU
910mm	910mm	F237
1220mm	910mm	F238

TIMBER OPTIONS

Timber Services has a wealth of knowledge in the timber industry, and this combined with our independent status allows us to always be flexible and competitive in our main specialty - Timber.

We stock a comprehensive range of structural and non structural carcassing timbers, so whether you're looking for studwork, joists, rafters, shed framework or decking subframe, see below for an overview* of our different grades.

*List is not exhaustive and stocked sizes are subject to change at any given time.

Product	Information	Nominal Size (mm)		Actual Size (mm)		Usage		
<u>KD</u> <u>REG'D</u>	Kiln Dried	47	100	45	95	Kiln Dried and Pressure Treated Carcassing suitable for Shed Framing, Decking Subframe, Pergolas, Raised Beds and Path Edging etc.		
	AC500 Pressure Treated		150		145			
<u>C16</u>	Strength Graded	47	100	45	95	Kiln Dried and Pressure Treated Carcassing that has been strength graded to a minimum of C16 in the British Standard BS5268-2. Usually specified in architectural drawings or by structural engineers where the timbers will be used as a load bearing or structural joist, or perhaps as a rafter in a cut roof where sheer weight is a factor. C16 timbers might not be seen and as such allow for greater visual defects such as knots, waness and grain variation, none of which affect the strength of the wood.		
			125		120			
			150		145			
	Kiln Dried AC500 Pressure Treated		175		170			
			200		195			
			225		220			
<u>C24</u>	Strength Graded	47	50	45	45	Kiln Dried and Pressure Treated Carcassing that has been strength graded to C24 in the British Standard BS5268-2. Usually specified in architectural drawings or by structural engineers where the timbers will be used as a load bearing or structural joist, or perhaps as a rafter in a cut roof where sheer weight is a factor. C24 timbers might be seen and as such allow for less visual defects than C16 so you will find less knots, wane and grain variation in the timber.		
			75		70			
			100		95			
			125		120			
			150		145			
			175		170			
	Kiln Dried AC500 Pressure Treated		200		195			
			225		220			
			75		100		70	95
					150			145
					200			195
					225			220
			100		100		95	95
200	195							
<u>CLS</u>	Studwork Untreated	50	75	38	63	Canadian Lumber Standard has been the go-to choice for internal stud in the UK for some time now, and is machined with the same smooth faces and eased corners as the regularised carcassing for easy handling. It differs from the above carcassing in that it finishes 7mm smaller in both dimensions than their carcassing 2"x3" and 2"x4" counterparts.		
	Kiln Dried		100		89			



FIRST CHOICE FOR TIMBER AND FENCING

TIMBER SERVICES OFFER A RANGE OF TIMBER AND RELATED PRODUCTS INCLUDING:

SAWN & TREATED TIMBER | PSEs | SHEET MATERIALS | TRT'D DECKING & COMPONENTS | MDF & SOFTWOOD MOULDINGS
ENGINEERED JOISTS & ROOF TRUSSES | IRONMONGERY - (NAILS, SCREWS, HINGES, JIFFIES) | HARDWOOD FLOORING
GATES AND FITTINGS | SLEEPERS | MACHINE ROUND POLES | FENCING PRODUCTS | CONCRETE PRODUCTS

CHAIN OF CUSTODY



The mark of
responsible forestry

IN RECOGNITION OF OUR RESPONSIBILITY TO THE ENVIRONMENT, OUR CUSTOMERS AND SUPPLIERS, WE BASE OUR COMMERCIAL ACTIVITIES ON LEGAL AND WELL-MANAGED FORESTS. AS SUCH WE ARE COMMITTED TO PROCURING TIMBER AND TIMBER PRODUCTS FROM INDEPENDENTLY VERIFIED SOURCES.

TIMBER SERVICES (UK) LTD RECOGNISES THAT THE INDEPENDENT THIRD PARTY CERTIFICATION OF FORESTS AND THE SUPPLY CHAIN IS THE OPTIMAL WAY OF GAINING ASSURANCES THAT THE TIMBER WE TRADE ORIGINATES FROM LEGAL AND WELL-MANAGED FORESTS. TO THIS END WE HAVE ACHIEVED FOREST STEWARDSHIP COUNCIL® (FSC®) AND PROGRAMME FOR THE ENDORSEMENT OF FOREST CERTIFICATION (PEFC) CHAIN OF CUSTODY CERTIFICATION (COC) FOR A RANGE OF PRODUCTS WE MANUFACTURE AND PURCHASE.

ALL PRODUCTS AND STATED SIZES ARE CORRECT AT TIME OF PRINT AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE. TIMBER SERVICES (UK) LTD RESERVES THE RIGHT TO DISCONTINUE AND / OR WITHDRAW ANY PRODUCTS FROM THE RANGE IN THIS BROCHURE.

KING'S LYNN

Oldmedow Road
King's Lynn, Norfolk
PE30 4LD

01553 760 000
kingslynn@timberservices.com

STOWMARKET

Gun Cotton Way,
Stowmarket, Suffolk
IP14 5XE

01449 860 000
stowmarket@timberservices.com

OPENING HOURS:

MON - FRI 07:00 - 17:00
SAT 08:00 - 12:00

TimberServicesUK 

@ServicesTimber 

timberservicesltd 